## SAGITTARIUS

## **TAPS & SHOWERING**

Construction Brass Body (CuZn38Pb18); ABS handle

Finishes Chrome plated to BS EN 248

Product Type Contemporary

Water Pressure Min. 0.5 bar, Max. 6.0 bar

Plumbing Systems Suitable for all plumbing systems, preferably balanced. Min. supply pressure

differential requirement is 5:1

Standards Complies with BSEN 1111

Certification Manufactured to comply with WRAS (Pending)

Cartridge Thermostatic

Fitting Escutcheon (S-unions)
Valve Integrate diverter ceramic valve

Check valve 0.5-10 gpm

Packaging 84 x 44 x 42cm / carton (5 boxes / carton)

Guarantee 10 years against manufacturing faults (excluding serviceable parts).


Additional Information 1. Temperature: Pre-set 38°C, with push button override to 48°C.

2. Automatic shut off in the event of hot or cold water supply failure.

3.Shower head: Chrome, Ø200mm, ABS 4.Shower handset: Chrome, 3 mode, ABS 5.Shower hose: Stainless steel, 1.5m 6. Riser Rail: Adjustable height riser rail. DREAM DELUXE EXPOSED VALVE AND RIGID RISER KIT

SH/609/C



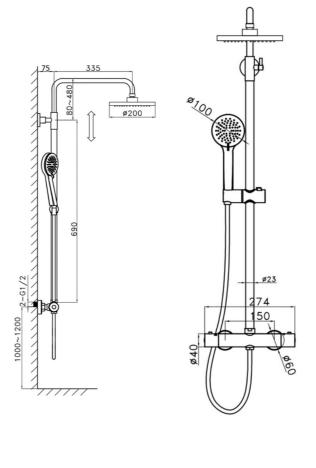


System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
SH/609/C	2.0	4.4	-	7.2	11.8	-	-	18.2	-	-

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

## SH/609/C EXPLOADED DRAWING

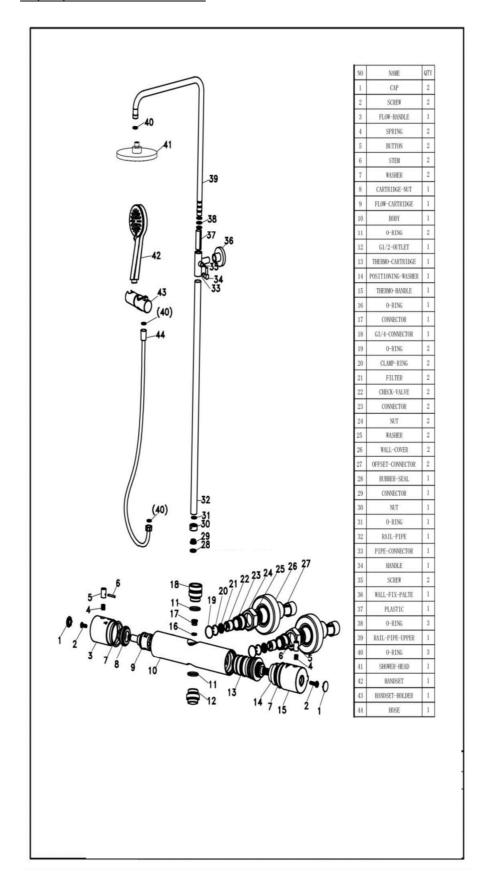

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice